



a·light

e l e m e n t s

a · hot sheet

special pricing
for
standard configurations
and key new products

CONFIDENTIAL

Pricing

Effective Oct 16, 2013

a · hot sheet elements

D5 · accolade⁵

a-hotsheet program: a-light is now offering certain products at a reduced rate for certain standard configurations.

Order process: In the subject line of your email with attached PO, please type "A-HOTSHEET ORDER". Confirmation of receipt of order will be issued by customer service within 2 hours. If confirmation is not received, agent should assume non-receipt. Call factory to verify. Time frame begins upon a-light's receipt of PO.

Lead time: *Ship within 10 working days.* Order must be received before 10am PST to count that same day within the 10 day timeframe.

Min/Max quantities: Minimum order is 1, maximum order is 50 for this lead time. Contact factory for lead time on 51+ pieces. Standard freight terms apply.

accolade⁵ | D5: This program applies only to the D5 recessed product - available to ship within 10 days when choosing from the following options. All other configurations require standard lead time of 4 weeks. Refer to "integrations" pricing for rows.



D5 Nomenclature:

Length (Nominal)	4 8	4' nominal lengths (1, 4ft lamp applies) 8' nominal lengths (2, 4ft lamps apply to single in cross "S" or "H"; 3, 3ft lamps apply when staggering "2" or "4")
Lamping	LL LS LH S H 2 4	LED low output LED standard output LED high output (1) standard T5 lamp (4' or 8' lengths) (1) T5HO lamp (4' or 8' lengths) staggered - Single lamp standard T5 (8ft lengths only, using 3-3' lamps) staggered - Single lamp T5HO (8ft lengths only, using 3-3' lamps)
LED Temp	30 35 40	3500k 3500k 4000k
Voltage	U	universal voltage 120 - 277V
Shielding	P A H S SH	a-parabola™ parabolic louver a-cirrus™ smooth opal acrylic diffuser HTLO™ high transmission linear patterned lens (n/a on 8ft staggered) WISP™ textured opal captive frosted lens WISP™ + HTLO™ (LED only)
Mounting	G T X N	gyp board/hard ceiling: housing/flange is unpainted 1/2" standard T-Bar ceiling: housing/flange is unpainted 1" standard T-Bar ceiling: housing/flange is unpainted slot 9/16" T-Bar: housing/flange is unpainted
Finish	---	n/a
Options	---	n/a



LED Configurations:

4 FT - SHIELDING: "SH" WISP + HTLO				
	30K	35K	40K	Pricing
GYP CEILING:				
"LL" Low Output	D54LL30USHG	D54LL35USHG	D54LL40USHG	
"LS" Standard Output	D54LS30USHG	D54LS35USHG	D54LS40USHG	
"LH" High Output	D54LH30USHG	D54LH35USHG	D54LH40USHG	
1/2" T-BAR:				
"LL" Low Output	D54LL30USHT	D54LL35USHT	D54LL40USHT	
"LS" Standard Output	D54LS30USHT	D54LS35USHT	D54LS40USHT	
"LH" High Output	D54LH30USHT	D54LH35USHT	D54LH40USHT	
1" T-BAR:				
"LL" Low Output	D54LL30USHX	D54LL35USHX	D54LL40USHX	
"LS" Standard Output	D54LS30USHX	D54LS35USHX	D54LS40USHX	
"LH" High Output	D54LH30USHX	D54LH35USHX	D54LH40USHX	
9/16" SLOT T-BAR				
"LL" Low Output	D54LL30USHN	D54LL35USHN	D54LL40USHN	
"LS" Standard Output	D54LS30USHN	D54LS35USHN	D54LS40USHN	
"LH" High Output	D54LH30USHN	D54LH35USHN	D54LH40USHN	

8 FT - SHIELDING: "SH" WISP + HTLO				
	30K	35K	40K	Pricing
GYP CEILING:				
"LL" Low Output	D58LL30USHG	D58LL35USHG	D58LL40USHG	
"LS" Standard Output	D58LS30USHG	D58LS35USHG	D58LS40USHG	
"LH" High Output	D58LH30USHG	D58LH35USHG	D58LH40USHG	
1/2" T-BAR:				
"LL" Low Output	D58LL30USHT	D58LL35USHT	D58LL40USHT	
"LS" Standard Output	D58LS30USHT	D58LS35USHT	D58LS40USHT	
"LH" High Output	D58LH30USHT	D58LH35USHT	D58LH40USHT	
1" T-BAR:				
"LL" Low Output	D58LL30USHX	D58LL35USHX	D58LL40USHX	
"LS" Standard Output	D58LS30USHX	D58LS35USHX	D58LS40USHX	
"LH" High Output	D58LH30USHX	D58LH35USHX	D58LH40USHX	
9/16" SLOT T-BAR:				
"LL" Low Output	D58LL30USHN	D58LL35USHN	D58LL40USHN	
"LS" Standard Output	D58LS30USHN	D58LS35USHN	D58LS40USHN	
"LH" High Output	D58LH30USHN	D58LH35USHN	D58LH40USHN	

T5 Fluorescent Configurations:

4 FT					
	"A" a-cirrus	"H" HTLO	"S" WISP	"P" a-parabola	Pricing
GYP CEILING:					
"S" (1) T5 in cross	D54SUAG	D54SUHG	D54SUSG	D54SUPG	
"H" (1) T5HO in cross	D54HUAG	D54HUHG	D54HUSG	D54HUPG	
1/2" T-BAR:					
"S" (1) T5 in cross	D54SUAT	D54SUHT	D54SUST	D54SUPT	
"H" (1) T5HO in cross	D54HUAT	D54HUHT	D54HUST	D54HUPT	
1" T-BAR:					
"S" (1) T5 in cross	D54SUAX	D54SUHX	D54SUSX	D54SUPX	
"H" (1) T5HO in cross	D54HUAX	D54HUHX	D54HUSX	D54HUPX	
9/16" SLOT T-BAR					
"S" (1) T5 in cross	D54SUAN	D54SUHN	D54SUSN	D54SUPN	
"H" (1) T5HO in cross	D54HUAN	D54HUHN	D54HUSN	D54HUPN	

8 FT					
	a-cirrus	HTLO	WISP	a-parabola	Pricing
GYP CEILING:					
"S" (1) T5 in cross	D58SUAG	D58SUHG	D58SUSG	D58SUPG	
"H" (1) T5HO in cross	D58HUAG	D58HUHG	D58HUSG	D58HUPG	
"2" staggered T5	D582UAG	n/a	D582USG	n/a	
"4" staggered T5HO	D584UAG	n/a	D584USG	n/a	
1/2" T-BAR:					
"S" (1) T5 in cross	D58SUAT	D58SUHT	D58SUST	D58SUPT	
"H" (1) T5HO in cross	D58HUAT	D58HUHT	D58HUST	D58HUPT	
"2" staggered T5	D582UAT	n/a	D582UST	n/a	
"4" staggered T5HO	D584UAT	n/a	D584UST	n/a	
1" T-BAR:					
"S" (1) T5 in cross	D58SUAX	D58SUHX	D58SUSX	D58SUPX	
"H" (1) T5HO in cross	D58HUAX	D58HUHX	D58HUSX	D58HUPX	
"2" staggered T5	D582UAX	n/a	D582USX	n/a	
"4" staggered T5HO	D584UAX	n/a	D584USX	n/a	
9/16" SLOT T-BAR:					
"S" (1) T5 in cross	D58SUAN	D58SUHN	D58SUSN	D58SUPN	
"H" (1) T5HO in cross	D58HUAN	D58HUHN	D58HUSN	D58HUPN	
"2" staggered T5	D582UAN	n/a	D582USN	n/a	
"4" staggered T5HO	D584UAN	n/a	D584USN	n/a	

a · hot sheet elements

G5 · architrave⁵

a-hotsheet program: a-light is now offering certain products at a reduced rate for certain standard configurations.

Order process: In the subject line of your email with attached PO, please type "A-HOTSHEET ORDER". Confirmation of receipt of order will be issued by customer service within 2 hours. If confirmation is not received, agent should assume non-receipt. Call factory to verify. Time frame begins upon a-light's receipt of PO.

Lead time: Ship within 10 working days for gyp flange "G". 15 days for T-Bar flanges "T", "X" or "N". Order must be received before 10am PST to count that same day within the 10 or 15 day timeframe.

Min/Max quantities: Minimum order is 1, maximum order is 50 for this lead time. Contact factory for lead time on 51+ pieces. Standard freight terms apply.


architrave⁵ | G5: This program applies only to the G5 recessed product - available to ship within 10 days when choosing from the following options. All other configurations require standard lead time of 4 weeks. Refer to "integrations" pricing for rows.

G5 Nomenclature:		
Length (Nominal)	4 8	4' nominal lengths (1 or 2, 4ft lamps apply) 8' nominal lengths (2, 4ft lamps apply to single in cross "S" or "H"; 3, 3ft lamps apply when staggering "2" or "4")
Lamping	LL LS LH S H D O 2 4	LED low output LED standard output LED high output (1) standard T5 lamp in cross (4' or 8' lengths) (1) T5HO lamp in cross (4' or 8' lengths) (2) standard T5 lamps in cross (4' or 8' lengths) (2) T5HO lamps in cross (4' or 8' lengths) staggered - Single lamp standard T5 (8ft lengths only, using 3-3' lamps) staggered - Single lamp T5HO (8ft lengths only, using 3-3' lamps)
LED Temp	30 35 40	3500k 3500k 4000k
Voltage	U	universal voltage 120 - 277V
Shielding	A H S SH	a-cirrus™ smooth opal acrylic diffuser HTLO™ high transmission linear patterned lens (n/a on 8ft staggered) WISP™ textured opal captive frosted lens WISP™ + HTLO™ (LED only)
Mounting	G T X N	gyp board/hard ceiling: housing/flange is unpainted 1/2" standard T-Bar ceiling: housing is unpainted/flange is painted satin white 1" standard T-Bar ceiling: housing is unpainted/flange is painted satin white slot 9/16" T-Bar: housing is unpainted/flange is painted satin white
Finish	W	satin white (T, X and N mounting only)
Options	--	n/a

LED Configurations:

4 FT - SHIELDING: WISP + HTLO				
	30K	35K	40K	Pricing
GYP CEILING:				
"LL" Low Output	G54LL30USHG	G54LL35USHG	G54LL40USHG	
"LS" Standard Output	G54LS30USHG	G54LS35USHG	G54LS40USHG	
"LH" High Output	G54LH30USHG	G54LH35USHG	G54LH40USHG	
1/2" T-BAR:				
"LL" Low Output	G54LL30USHTW	G54LL35USHTW	G54LL40USHTW	
"LS" Standard Output	G54LS30USHTW	G54LS35USHTW	G54LS40USHTW	
"LH" High Output	G54LH30USHTW	G54LH35USHTW	G54LH40USHTW	
1" T-BAR:				
"LL" Low Output	G54LL30USHXW	G54LL35USHXW	G54LL40USHXW	
"LS" Standard Output	G54LS30USHXW	G54LS35USHXW	G54LS40USHXW	
"LH" High Output	G54LH30USHXW	G54LH35USHXW	G54LH40USHXW	
9/16" SLOT T-BAR:				
"LL" Low Output	G54LL30USHNW	G54LL35USHNW	G54LL40USHNW	
"LS" Standard Output	G54LS30USHNW	G54LS35USHNW	G54LS40USHNW	
"LH" High Output	G54LH30USHNW	G54LH35USHNW	G54LH40USHNW	

8 FT - SHIELDING: WISP + HTLO				
	30K	35K	40K	Pricing
GYP CEILING:				
"LL" Low Output	G58LL30USHG	G58LL35USHG	G58LL40USHG	
"LS" Standard Output	G58LS30USHG	G58LS35USHG	G58LS40USHG	
"LH" High Output	G58LH30USHG	G58LH35USHG	G58LH40USHG	
1/2" T-BAR:				
"LL" Low Output	G58LL30USHTW	G58LL35USHTW	G58LL40USHTW	
"LS" Standard Output	G58LS30USHTW	G58LS35USHTW	G58LS40USHTW	
"LH" High Output	G58LH30USHTW	G58LH35USHTW	G58LH40USHTW	
1" T-BAR:				
"LL" Low Output	G58LL30USHXW	G58LL35USHXW	G58LL40USHXW	
"LS" Standard Output	G58LS30USHXW	G58LS35USHXW	G58LS40USHXW	
"LH" High Output	G58LH30USHXW	G58LH35USHXW	G58LH40USHXW	
9/16" SLOT T-BAR:				
"LL" Low Output	G58LL30USHNW	G58LL35USHNW	G58LL40USHNW	
"LS" Standard Output	G58LS30USHNW	G58LS35USHNW	G58LS40USHNW	
"LH" High Output	G58LH30USHNW	G58LH35USHNW	G58LH40USHNW	

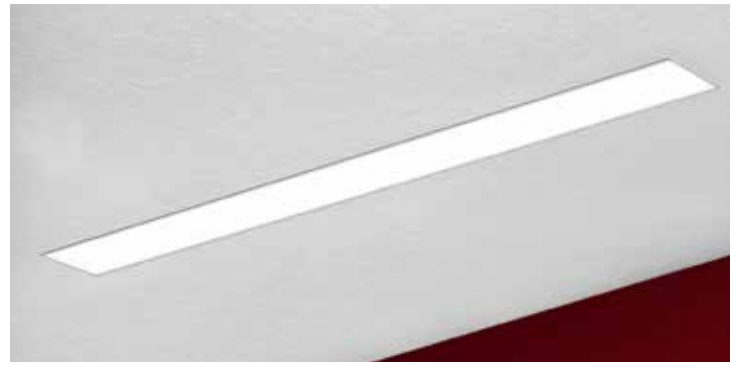

T5 Fluorescent Configurations:

4 FT				
	a-cirrus	HTLO	WISP	Pricing
GYP CEILING:				
"S" (1) T5 in cross	G54SUAG	G54SUHG	G54SUSG	
"H" (1) T5HO in cross	G54HUAG	G54HUHG	G54HUSG	
"D" (2) T5 in cross	G54DUAG	G54DUHG	G54DUSG	
"O" (2) T5HO in cross	G54OUAG	G54OUHG	G54OUSG	
1/2" T-BAR:				
"S" (1) T5 in cross	G54SUATW	G54SUHTW	G54SUSTW	
"H" (1) T5HO in cross	G54HUATW	G54HUHTW	G54HUSTW	
"D" (2) T5 in cross	G54DUATW	G54DUHTW	G54DUSTW	
"O" (2) T5HO in cross	G54OUATW	G54OUHTW	G54OUSTW	
1" T-BAR:				
"S" (1) T5 in cross	G54SUAXW	G54SUHXW	G54SUSXW	
"H" (1) T5HO in cross	G54HUAXW	G54HUHXW	G54HUSXW	
"D" (2) T5 in cross	G54DUAXW	G54DUHXW	G54DUSXW	
"O" (2) T5HO in cross	G54OUAXW	G54OUHXW	G54OUSXW	
9/16" SLOT T-BAR:				
"S" (1) T5 in cross	G54SUANW	G54SUHNW	G54SUSNW	
"H" (1) T5HO in cross	G54HUANW	G54HUHNW	G54HUSNW	
"D" (2) T5 in cross	G54DUANW	G54DUHNW	G54DUSNW	
"O" (2) T5HO in cross	G54OUANW	G54OUHNW	G54OUSNW	

8 FT				
	a-cirrus	HTLO	WISP	Pricing
GYP CEILING:				
"S" (1) T5 in cross	G58SUAG	G58SUHG	G58SUSG	
"H" (1) T5HO in cross	G58HUAG	G58HUHG	G58HUSG	
"D" (2) T5 in cross	G58DUAG	G58DUHG	G58DUSG	
"O" (2) T5HO in cross	G58OUAG	G58OUHG	G58OUSG	
"2" staggered T5	G582UAG	n/a	G582USG	
"4" staggered T5HO	G584UAG	n/a	G584USG	
1/2" T-BAR:				
"S" (1) T5 in cross	G58SUATW	G58SUHTW	G58SUSTW	
"H" (1) T5HO in cross	G58HUATW	G58HUHTW	G58HUSTW	
"D" (2) T5 in cross	G58DUATW	G58DUHTW	G58DUSTW	
"O" (2) T5HO in cross	G58OUATW	G58OUHTW	G58OUSTW	
"2" staggered T5	G582UATW	n/a	G582USTW	
"4" staggered T5HO	G584UATW	n/a	G584USTW	
1" T-BAR:				
"S" (1) T5 in cross	G58SUAXW	G58SUHXW	G58SUSXW	
"H" (1) T5HO in cross	G58HUAXW	G58HUHXW	G58HUSXW	
"D" (2) T5 in cross	G58DUAXW	G58DUHXW	G58DUSXW	
"O" (2) T5HO in cross	G58OUAXW	G58OUHXW	G58OUSXW	
"2" staggered T5	G582UAXW	n/a	G582USXW	
"4" staggered T5HO	G584UAXW	n/a	G584USXW	
9/16" SLOT T-BAR:				
"S" (1) T5 in cross	G58SUANW	G58SUHNW	G58SUSNW	
"H" (1) T5HO in cross	G58HUANW	G58HUHNW	G58HUSNW	
"D" (2) T5 in cross	G58DUANW	G58DUHNW	G58DUSNW	
"O" (2) T5HO in cross	G58OUANW	G58OUHNW	G58OUSNW	
"2" staggered T5	G582UANW	n/a	G582USNW	
"4" staggered T5HO	G584UANW	n/a	G584USNW	



a · hot sheet elements

H1 · abacus¹


a-hotsheet program: a-light is now offering certain products at an introductory rate.

Order process: In the subject line of your email with attached PO, please type "A-HOTSHEET ORDER". Confirmation of receipt of order will be issued by customer service within 2 hours. If confirmation is not received, agent should assume non-receipt. Call factory to verify. Time frame begins upon a-light's receipt of PO.

Lead time: *Ship within 15 working days.* Order must be received before 10am PST to count that same day within the 15 day timeframe.

Min/Max quantities: Minimum order is 10, maximum order is 50 for this lead time. Contact factory for lead time on 51+ pieces. Standard freight terms apply.

abacus¹ | H1: This program applies only to the H1 recessed product - available to ship within 15 days when choosing from the following options. All other configurations require standard lead time of 4 weeks.



2ft wide x 4" high

H1 Nomenclature:

Length (Nominal)	2	2' nominal length
Lamping	LL LS LH D O T F	LED low output LED standard output LED high output (2) Standard T5 lamps in cross section (2) T5HO lamps in cross section (3) Standard T5 lamps in cross section (3) T5HO lamps in cross section
LED Temp	30 35 40	3500k 3500k 4000k
Voltage	U	universal voltage 120 - 277V
Shielding	OA	opal acrylic diffuser
Mounting	K	universal t-bar
Finish	L	gloss white
Options	---	n/a

Available Configurations:

2 FT		
	Opal Acrylic	
LED		Special Pricing
"LL" Low Output 30k	H12LL30UOAKL	
"LL" Low Output 35k	H12LL35UOAKL	
"LL" Low Output 40k	H12LL40UOAKL	
"LS" Standard Output 30k	H12LS30UOAKL	
"LS" Standard Output 35k	H12LS35UOAKL	
"LS" Standard Output 40k	H12LS40UOAKL	
"LH" High Output 30k	H12LH30UOAKL	
"LH" High Output 35k	H12LH35UOAKL	
"LH" High Output 40k	H12LH40UOAKL	
Fluorescent		
"D" (2) T5 in cross	H12DUOAKL	
"O" (2) T5HO in cross	H12OUOAKL	
"T" (3) T5 in cross	H12TUOAKL	
"F" (3) T5HO in cross	H12FUOAKL	



a · hot sheet elements

J1 · archivolt¹


a-hotsheet program: a-light is now offering certain products at an introductory rate.

Order process: In the subject line of your email with attached PO, please type "A-HOTSHEET ORDER". Confirmation of receipt of order will be issued by customer service within 2 hours. If confirmation is not received, agent should assume non-receipt. Call factory to verify. Time frame begins upon a-light's receipt of PO.

Lead time: *Ship within 15 working days.* Order must be received before 10am PST to count that same day within the 15 day timeframe.

Min/Max quantities: Minimum order is 10, maximum order is 50 for this lead time. Contact factory for lead time on 51+ pieces. Standard freight terms apply.

archivolt¹ | J1: This program applies only to the J1 wall mount with bracket - available to ship within 15 days when choosing from the following options. All other configurations require standard lead time of 4 weeks.



4-1/4" wide x 5-1/8" high

J1 Nomenclature:

Length (Nominal)	2 4	2' nominal lengths 4' nominal lengths
Lamping	LL LS LH S H	LED low output LED standard output LED high output (1) standard T5 lamps in cross section (1) T5HO lamps in cross section
LED Temp	30 35 40	3500k 3500k 4000k
Voltage	U	universal voltage 120 - 277V
Shielding	D	clear acrylic dust cover
Mounting	WB	wall bracket
Finish	T	a-lightanium™
Options	---	n/a

Available Configurations:

	2 FT		4 FT	
	Clear Dust Cover		Clear Dust Cover	
LED	Special 2ft Pricing		Special 4ft Pricing	
"LL" Low Output 30k	J12LL30UDWBT		J14LL30UDWBT	
"LL" Low Output 35k	J12LL35UDWBT		J14LL35UDWBT	
"LL" Low Output 40k	J12LL40UDWBT		J14LL40UDWBT	
"LS" Standard Output 30k	J12LS30UDWBT		J14LS30UDWBT	
"LS" Standard Output 35k	J12LS35UDWBT		J14LS35UDWBT	
"LS" Standard Output 40k	J12LS40UDWBT		J14LS40UDWBT	
"LH" High Output 30k	J12LH30UDWBT		J14LH30UDWBT	
"LH" High Output 35k	J12LH35UDWBT		J14LH35UDWBT	
"LH" High Output 40k	J12LH40UDWBT		J14LH40UDWBT	
Fluorescent				
"S" (1) T5 in cross	J12SUDWBT		J14SUDWBT	
"H" (1) T5HO in cross	J12HUDWBT		J14HUDWBT	



a · hot sheet elements

J5 · archivolt⁵


a-hotsheet program: a-light is now offering certain products at an introductory rate.

Order process: In the subject line of your email with attached PO, please type "A-HOTSHEET ORDER". Confirmation of receipt of order will be issued by customer service within 2 hours. If confirmation is not received, agent should assume non-receipt. Call factory to verify. Time frame begins upon a-light's receipt of PO.

Lead time: *Ship within 15 working days.* Order must be received before 10am PST to count that same day within the 15 day timeframe.

Min/Max quantities: Minimum order is 10, maximum order is 50 for this lead time. Contact factory for lead time on 51+ pieces. Standard freight terms apply.

archivolt⁵ | J5: This program applies only to the J5 recessed - available to ship within 15 days when choosing from the following options. All other configurations require standard lead time of 4 weeks.



6" wide x 5" high



J5 Nomenclature:

Length (Nominal)	2 4	2' nominal lengths 4' nominal lengths
Lamping	LL LS LH S H	LED low output LED standard output LED high output (1) standard T5 lamps in cross section (1) T5HO lamps in cross section
LED Temp	30 35 40	3500k 3500k 4000k
Voltage	U	universal voltage 120 - 277V
Shielding	D	clear acrylic dust cover
Mounting	K	universal t-bar
Finish	W	satin white
Options	---	n/a

Available Configurations:

	2 FT		4 FT	
	Clear Dust Cover		Clear Dust Cover	
LED	Special 2ft Pricing		Special 4ft Pricing	
"LL" Low Output 30k	J52LL30UDKW		J54LL30UDKW	
"LL" Low Output 35k	J52LL35UDKW		J54LL35UDKW	
"LL" Low Output 40k	J52LL40UDKW		J54LL40UDKW	
"LS" Standard Output 30k	J52LS30UDKW		J54LS30UDKW	
"LS" Standard Output 35k	J52LS35UDKW		J54LS35UDKW	
"LS" Standard Output 40k	J52LS40UDKW		J54LS40UDKW	
"LH" High Output 30k	J52LH30UDKW		J54LH30UDKW	
"LH" High Output 35k	J52LH35UDKW		J54LH35UDKW	
"LH" High Output 40k	J52LH40UDKW		J54LH40UDKW	
Fluorescent				
"S" (1) T5 in cross	J52SUDKW		J54SUDKW	
"H" (1) T5HO in cross	J52HUDKW		J54HUDKW	